



DEKO GV

Double Glazed Partition, High Sound Reduction

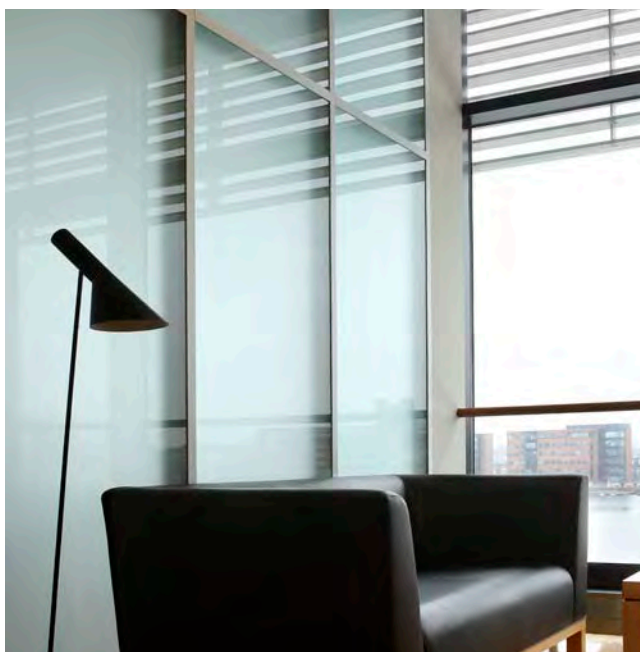

- Same post construction for glass, gypsum, and doors
- Slim joint detail options
- Wide range of decoration available
- Ease of maintenance
- Reusable
- Individual modules
- Demountable
- Fire tested
- Sound tested

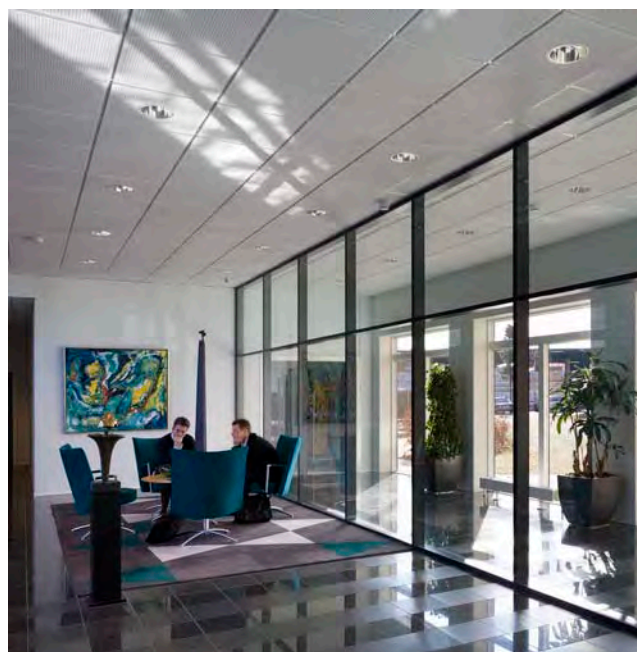

DEKO double glazed partitions offer light and spacious room formations without compromising sound and fire requirements.

DEKO GV glazed partitions are fitted flush with the surface of the partition making it particularly suitable for offices, atriums, conference rooms, schools, and public buildings, offering impressive sound and fire requirements.

For further information and reference photos please visit www.dekogv.com.



DEKO partitions ltd of denmark - Middle East
P. O. Box 42738, Abu Dhabi, United Arab Emirates

Tel: +971 50 445 0535 · Fax: +971 2 632 2365
info@deko.ae · www.deko.ae

Type Summary - DEKO GV

Type	Partition Thickness (mm)	Glazed Module (Number)	Glass thickness	Weight (kg/sqm)	Airborne Sound Insulation (Rw)	Fire Resistance
GV 1090	92	2	4 + 6 mm	25-35	39 (44) dB*	Unclassified
GV 1290	118	2	4 + 6 mm	25-45	39 (49) dB*	Unclassified/EI60**
GV 1490	144	2	4 + 6 mm	25-35	39 (44) dB*	Unclassified
GV 1090 F30	92	2	4 mm float glass + 7 mm fire rated glass	30	39 dB	F30
GV 1290 F30	118	2	4 mm float glass + 7 mm fire rated glass	30	39 dB	F30

*) The sound insulation values in brackets have been achieved by incorporating other glass types than our standard glass. It is also possible to achieve the values of 41, 42, and 44 dB respectively by using special glass.

**) The values are based on official DELTA tests. The GV partition with dedicated sprinkler system and 6 + 8 mm toughened glass meets the EI60 fire requirements. It has been officially tested at the Danish Institute of Fire and Security Technology.